




Medical Hot Swap PC A249i-HS Specifications

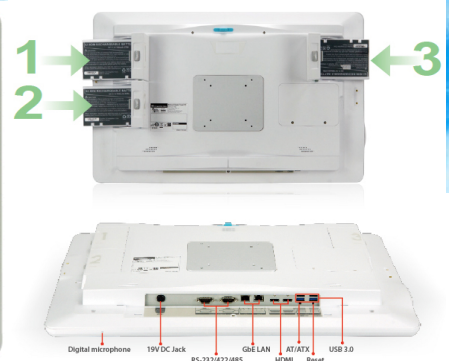

Client Mode

- Battery Capacity
- Battery Temperature
- Time to Fully Charged
- Battery Remaining Time
- Status: Charging / In use / Stand by
- Low Power Alert (<10%)
- Hibernate (<3%), to avoid shutting down data loss

Server Mode (Central Management)

- Battery Remote Monitoring
- IP/Mac-Address Management

IT Center

Processor	Intel i7 6600U 4MB cache, up to 3.4GHz Intel i5 6300U 3MB cache, up to 3.0GHz
Memory	4GB(max32GB)
Storage	120GB SATA SSD (max 1TB)
I/O	2 x USB2.0, 4 x USB3.0, 2 x serial, 2 x HDMI, 2 x LAN, PCIe Mini
Security options	Internal RFID, TPM support
WLAN & Bluetooth	802.11 a/b/g/n/ac internal. Bluetooth 4.2
Display	24inchTFT LED, Crystal Clear glass 10 points PCAP touch
Sizes	595 x 380 x 71 mm
Webcam	5MP
Resolution	1920 x 1080 full HD, 2 x external 4096 x 2160
Pixel Pitch	0.2715 x 0.2715
Viewing Angle	178 degrees
Active screen area	521.28 (H) x 293.22 (V)
Contrast Ratio	1000 (Typ)
Luminance	300 cd/m ²
Optical response time	5ms
Enclosure	IP65 front, IP63 full housing waterprotected Anti-bacterial, Color White
Power	19V DC , 3 x hot swap7800 mAH batteries
Power consumption	29 Watts
Weight	8 kg without batteries, 9.53kg with batteries
Touch Screen (option)	Capacitive 10p Multi Touch
Operating temperature	0°C to 40°C
Storage temperature	-20°C to +60°C
Compliance	CE, FCC-B, RoHS, IEC 60601-1, Energy Star
Operating System	Windows 7, Windows 10
Thin Client compatibility	Citrix, Microsoft, VMware

